

PRODUCT SPECIFICATIONS



PCB COMMERCIAL SERIES 50 Hz

SELF-CONTAINED PACKAGE AIR CONDITIONER

7½, 10, AND 15 TON
[26.4 kW to 52.8 kW]

COOLING CAPACITY:
90,000 TO 180,000 BTU/H



The PCB Commercial 50 Hz self-contained packaged air conditioner is designed for ground-level or rooftop application.

Standard Features

- Dual high-efficiency scroll compressors with internal motor protection (2-stage cooling; three compressors on 15-ton units)
- Compressor grommets for vibration isolation
- Time delay for compressor sequencing
- Fully charged systems
- High- and low-pressure controls on all systems
- Mild ambient switch
- Two independent condenser coils for 2-stage operation
- Totally enclosed, permanently lubricated ball-bearing outdoor fan motors
- Enhanced copper tube/aluminum fin coils
- Expansion valve evaporator coil
- Vertical discharge with removable grilles
- Galvanized steel, powder-coated drain pan with 3/4" (19mm) NPT condensate connection
- Belt-driven, variable-pitch sheave permits multi-speed adjustment
- Centrifugal fan for quiet and efficient operation
- Filters (2" [50.8mm] disposable) provided with unit
- Operates up to 125°F ambient temperature

Cabinet Features

- Heavy-gauge, zinc-coated steel cabinet with weather-resistant powder-paint finish
- Fully insulated with blankets of insulation
- Built-in filter rack
- Factory wiring conveniently arranged for installation of accessories
- Control box and compressors easily accessible from side access panels

Accessory Heat Kit Features

- Control circuitry arranged to readily permit staging
- Rust-resistant nickel chromium heating elements
- Primary and secondary limit protection
- Factory-installed one-time fuses on all models

Accessories

- Room thermostat; Low-ambient control
- Rooftop Lift Kit; Roof curb
- Economizers (horizontal and vertical)
- Manual/motorized fresh air damper
- Horizontal Duct Kit (Downflow to Horizontal Conversion)
50 Hz (field-installed accessory)
- Panel Louver Kit



PRODUCT SPECIFICATIONS

NOMENCLATURE

PCB 090 - 5

ELECTRICAL DESIGNATOR

5 - 380/415 VAC, 3ph, 50Hz

NOMINAL COOLING CAPACITY

090 - 90,000 BTU/h

120 - 120,000 BTU/h

180 - 180,000 BTU/h

UNIT TYPE

PCB - Package Cool

SPECIFICATIONS

	PCB090-5	PCB120-5	PCB180-5
Total Cooling - BTU/h (kW)	88,400 (25.9)	118,600 (34.8)	172,000 (50.4)
Sensible Cooling - BTU/h ¹ (kW)	67,100 (19.7)	89,200 (26.1)	131,000 (38.4)
EER ²	8.9	9.7	8.5
Indoor Blower (Qty.)	2	2	2
Type	Belt	Belt	Belt
Size - D x W (mm)	12 x 12 (305 x 305)	12 x 15 (305 x 381)	12 x 15 (305 x 381)
Motor Horsepower (kW)	2 (1.49)	3 (2.24)	5 (3.73)
Indoor CFM Nominal (L/S)	3000 (1416)	4000 (1888)	5600 (2643)
Evaporator Coil (Qty.)	1	1	1
Face Area - Ft. ² (m ²)	9.3 (0.86)	14.0 (1.3)	14.0 (1.3)
Rows/FPI (FPM)	3/16 (630)	3/16 (630)	3/16 (630)
Tube Diameter (mm)/Material	3/8" (9.5)/Copper	3/8" (9.5)/Copper	3/8" (9.5)/Copper
Filter Size/Qty. (mm)	25" x 25" x 2" (635 x 635 x 8.51)/3	16" x 25" x 2" (406 x 635 x 51)/3 20" x 25" x 2" (508 x 635 x 51)/3	16" x 25" x 2" (406 x 635 x 51)/3 20" x 25" x 2" (508 x 635 x 51)/3
Outdoor Fan (Qty.)	2	2	4
Fan Diameter (mm)	24" (610)	24" (610)	22" (559)
Motor Horsepower (kW)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)
Outdoor CFM Nominal (L/S)	4300 (2030)	6100 (2880)	7000 (3300)
Condenser Coil (Qty.)	1	1	1
Face Area Total - Ft. ² (m ²)	15.6 (1.45)	23.8 (2.21)	23.8 (2.21)
Rows/FPI (FPM)	2/21 (827)	2/21 (827)	3/16 (630)
Tube Diameter (mm)/Material	3/8 (9.5)/Copper	3/8 (9.5)/Copper	3/8 (9.5)/Copper
Number of Compressors	2	2	3
Volts-Phase	380-415-3	380-415-3	380-415-3
Compressor RLA/LRA	6.7/47.5	9.5/73.0	9.5/73.0
Blower FLA - Indoor/Outdoor	3.4/1.7	4.2/1.7	7.3/1.7
Minimum Circuit Ampacity ³	23.6	31.3	49.5
Maximum Fuse Size	30	50	60
Ship Weight - lbs. (kg)	990 (449.5)	1215 (551.6)	1460 (662.8)

¹ Sensible capacity is gross, with no deduction for indoor motor heat


² BTU/Watt @ 80/67°F (26.7/19.4°C) inside - 95°F (35°C) outside air

³ Wire size should be in accordance with Local Electrical Codes. Extensive wire runs will require larger wire sizes.

DIMENSIONS


All dimensions in inches and millimeters. Drawings are not to scale.

FIGURE 1. VERTICAL DISCHARGE

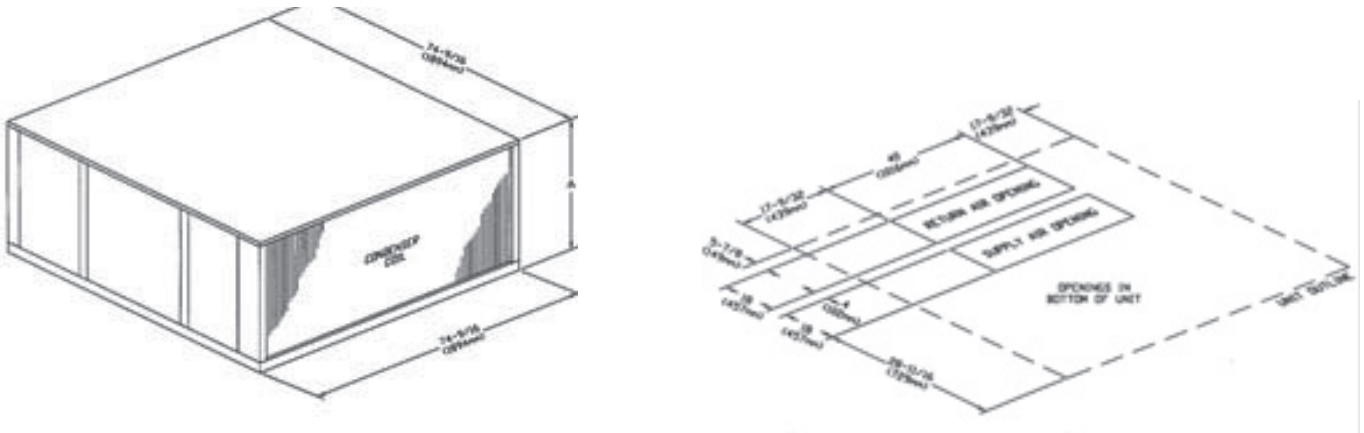

See curb details for connection of duct work to curb. Duct work is not intended to be connected to unit.


FIGURE 2. HORIZONTAL DISCHARGE

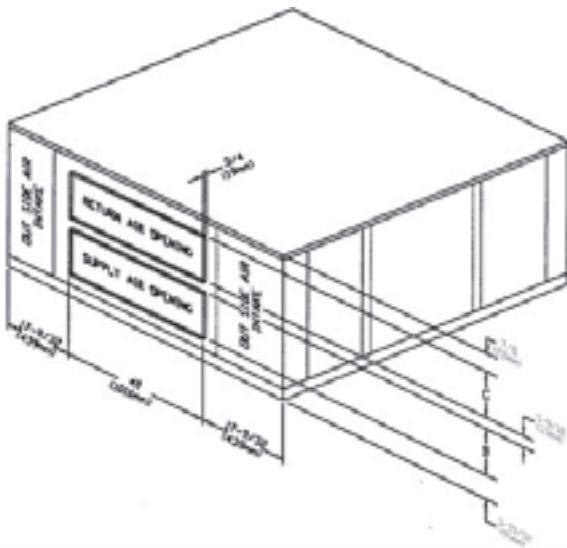

Note: The Horizontal Conversion Kit is required to convert a factory duct configuration (downflow) to a horizontal duct configuration, as shown in Figure 2.

UNIT SIZE	A - HEIGHT	B - SUPPLY AIR	C - RETURN AIR
090	36" (914 mm)	12½" (318 mm)	179/16" (446 mm)
120,180	52" (1321 mm)	20¼" (514 mm)	2513/16" (656 mm)

ELECTRICAL CONNECTIONS

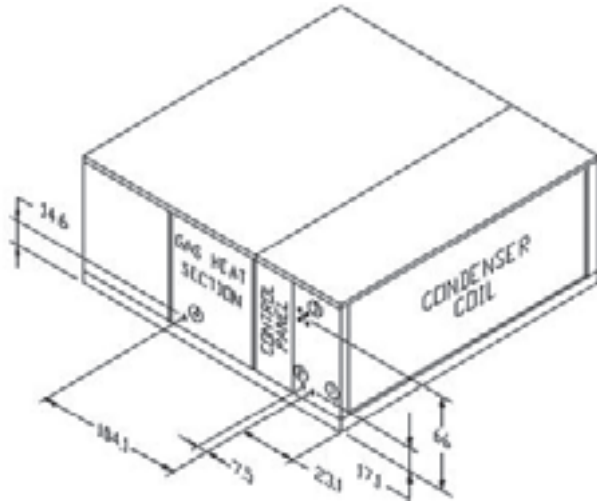

MODEL	B
PCB090-5	7½" (200 mm)
PCB120-5	23¾" (606 mm)
PCB180-5	23¾" (606 mm)

- 1- Main power entrance location (with electric heat installed)
- 2- Control wiring entrance location
- 3- Main power entrance location (without electric heat installed)

Note: Single-point wiring is available at location #1 when heat kit is installed. See installation instructions for heat kits.

FIGURE 3. ELECTRICAL HEAT UNITS

ELECTRIC HEAT

ELECTRIC HEAT AIR TEMPERATURE RISE @ NOMINAL VOLTAGE

Heater Model	HKCB20	HKCB30	HKCB40	
No. Stages	2	2	2	
Output MBH (W)	67.5 (19.8)	101.3 (29.7)	135.0 (39.6)	
CFM & (L/S)	2600 (1227)	24.2 (13.4)	36.2 (20.1)	
	2800 (1320)	22.5 (12.5)	33.6 (18.7)	
	3000 (1415)	21.0 (11.7)	31.4 (17.4)	
	3200 (1510)	19.7 (10.9)	29.4 (16.3)	39.3 (21.8)
	3400 (1605)	18.5 (10.3)	27.7 (15.4)	37.0 (20.6)
	3600 (1700)	17.5 (9.7)	26.2 (14.6)	34.9 (19.4)
	3800 (1793)	16.5 (9.2)	24.8 (13.8)	33.1 (18.4)
	4000 (1888)	15.7 (8.7)	23.5 (13.1)	31.4 (17.4)
	4200 (1982)	15.0 (8.3)	22.4 (12.4)	29.9 (16.6)
	4400 (2076)	14.3 (7.9)	21.4 (11.9)	28.6 (15.9)
	4600 (2171)	13.7 (7.6)	20.5 (11.4)	27.3 (15.2)
	4800 (2265)	13.1 (7.3)	19.6 (10.9)	26.2 (14.6)
	5000 (2360)	12.6 (7.0)	18.8 (10.4)	25.2 (14.0)
	5200 (2454)	12.1 (6.7)	18.1 (10.1)	24.2 (13.4)
	5400 (2548)	11.6 (6.4)	17.4 (9.7)	23.3 (12.9)
	5600 (2643)	11.2 (6.2)	16.8 (9.3)	22.5 (12.5)
5800 (2737)	10.8 (6.0)	16.2 (9.0)	21.7 (12.1)	
6000 (2832)	10.5 (5.8)	15.7 (8.7)	21.0 (11.7)	

Notes:

1. Maximum air temperature rise of 40°F (22.2°C) must not be exceeded.
2. See Electric Heater Availability table for various unit sizes.
3. Air temperature rise is for total heating capacity: Temperature rises at other conditions may be calculated by using the formula:

$$\text{Temperature Rise} = \frac{\text{Output Capacity - BTU/h}}{1.08 \times \text{ft}^3/\text{min. Airflow}}$$

Note: Temperature rises must be calculated in other than nominal voltage conditions.

4. For altitudes over 2,000', air temperature rise must be calculated using the formula:

$$\text{Temperature Rise} = \frac{\text{Output Capacity - BTU/h}}{14.4 \times \text{ft}^3/\text{Min. Airflow} \times \text{Specific Weight of Air}}$$

5. Operation at less than nominal voltages must be de-rated by the following factors: 415 volt-0.75; 380 volt-0.63.

NOMINAL VOLTAGE FOR HKCB

	@ 480V	@ 415V	@ 380V
HKCB20-4	19.8 kW	14.9 kW	12.5 kW
HKCB30-4	29.7 kW	22.3 kW	18.7 kW
HKCB40-4	39.6 kW	29.7 kW	25.0 kW

ELECTRIC HEATER AVAILABILITY

Unit Size	HKCB20	HKCB30	HKCB40
7½	X	X	X
10	X	X	X
15	X	X	X

FAN PERFORMANCE DATA

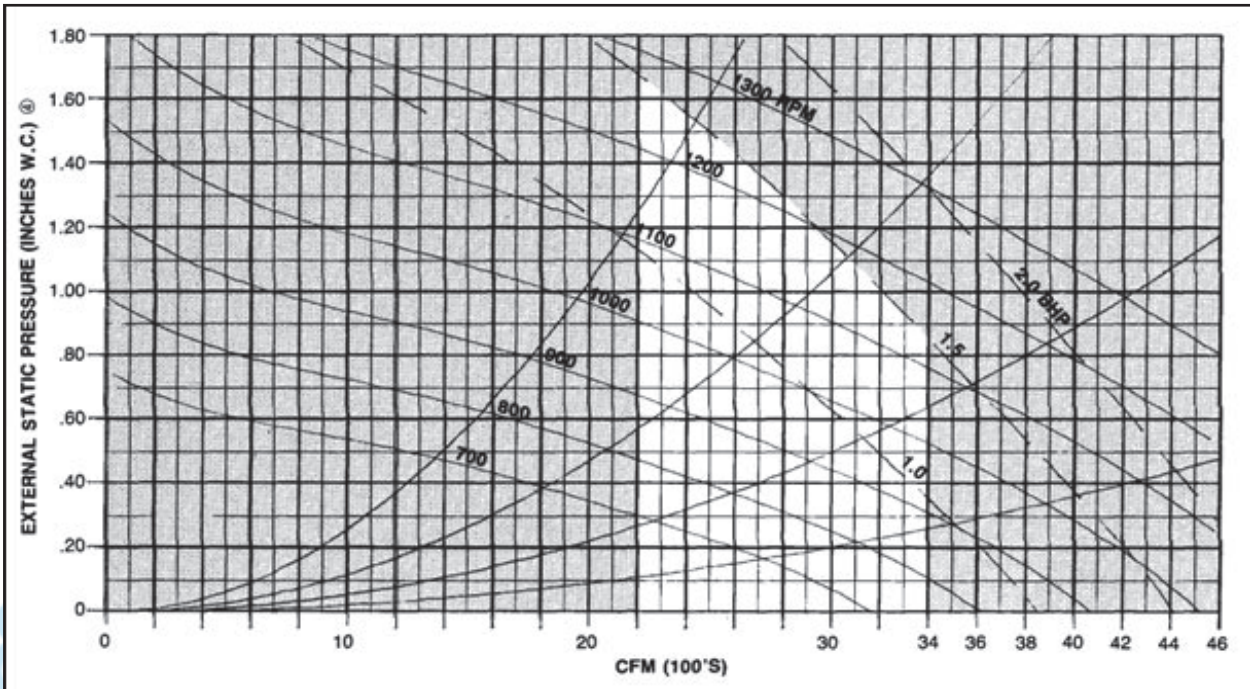


FIGURE 4. FAN CURVE - PCB 090

SUPPLY FAN PERFORMANCE - PCB090

CFM	EXTERNAL STATIC PRESSURE (INCHES W.C.) SEE NOTE (3)															
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2600	669	0.44	816	0.59	916	0.75	1004	0.92	1084	1.09	1157	1.28	1226	1.47	1291	1.67
2800	734	0.53	847	0.69	944	0.85	1030	1.03	1109	1.21	1181	1.40	1249	1.60	1312	1.91
3000	770	0.62	877	0.79	973	0.97	1053	1.15	1135	1.34	1206	1.54	1273	1.75	1336	1.96
3200	807	0.73	909	0.91	1002	1.10	1086	1.29	1162	1.49	1232	1.70	1298	1.91	1360	2.12
3400	845	0.85	942	1.04	1032	1.24	1114	1.44	1159	1.65	1259	1.87	1324	2.09	1384	2.31

Notes:

- Selections in *ITALICS* require a field drive change. See following table below for drive ranges.
- Table includes all internal pressure drops including cabinet losses. See Pressure Drops table that must be considered as part of external static pressure drop.
- DO NOT SELECT IN SHADED AREAS (FOR INTERPOLATION ONLY).

SUPPLY FAN DRIVE DATA - PCB090

MOTOR SHEAVE - ADJUSTABLE		FACTORY SETTING					
FAN SHEAVE - FIXED		2 TURNS OPENS					
MOTOR SHEAVE TURNS OPEN		0	1	2	3	4	5
FAN RPM	2.0 HP MOTOR	1209	1146	1082	1018	955	891

Note: Allow ±5% variation in blower RPM due to pulley manufacturing tolerances.

Conversion Factor:
 1 CFM = 0.472 L/S
 1" W.C. = 2.5 M Bar
 1 HP = 0.747 kW



PRODUCT SPECIFICATIONS

FAN PERFORMANCE DATA (CONT.)

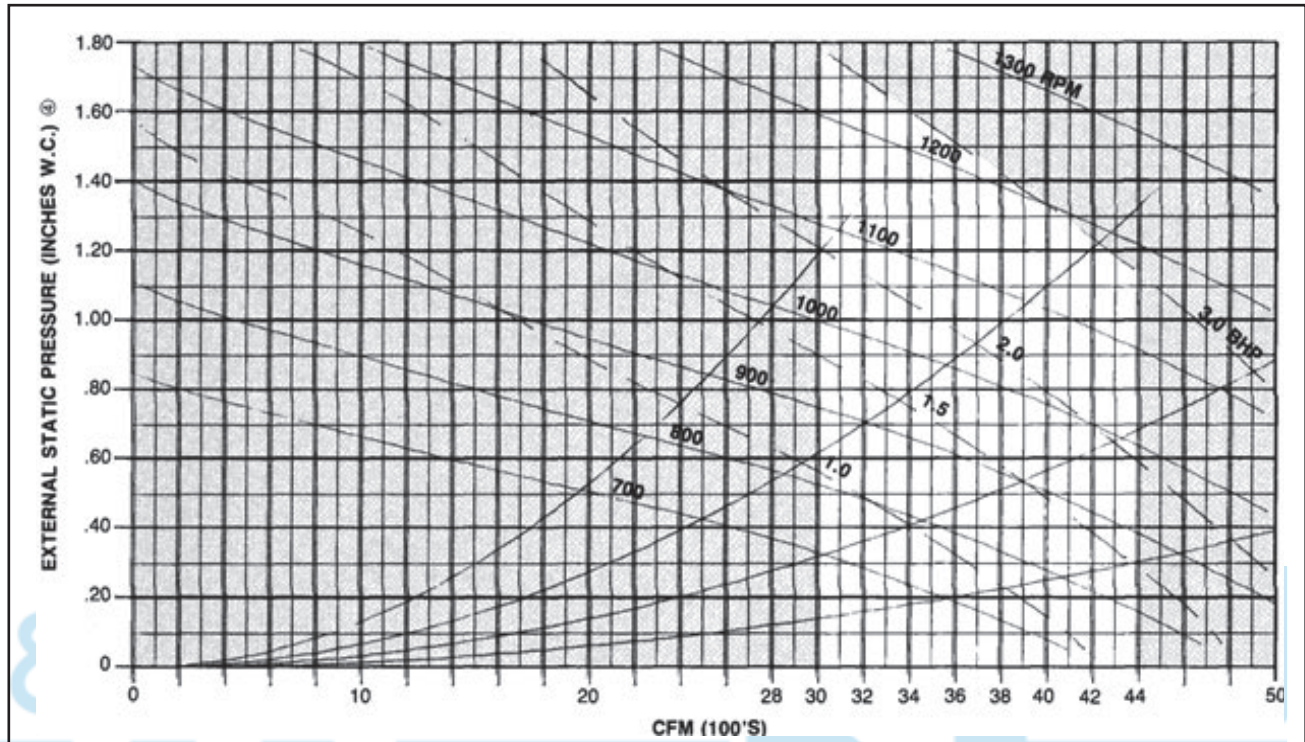


FIGURE 5. FAN CURVE - PCB 120

SUPPLY FAN PERFORMANCE - PCB120

CFM	External Static Pressure (INCHES W.C.)															
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3400	679	0.73	781	0.98	873	1.26	957	1.58	1034	1.91	1105	2.26	1171	2.26	1233	2.99
3600	706	0.83	805	1.10	894	1.39	975	1.71	1051	2.05	1121	2.41	1188	2.78	1249	3.17
3800	733	0.95	829	1.23	916	1.53	995	1.85	1069	2.20	1139	2.57	1204	2.95	1266	3.36
4000	761	1.07	855	1.37	938	1.68	1016	2.01	1088	2.36	1156	2.74	1221	3.14	1282	3.55
4200	790	1.21	880	1.52	961	1.84	1037	2.18	1108	2.54	1175	2.93	1239	3.33	1299	3.75
4400	818	1.36	906	1.68	985	2.01	1059	2.36	1128	2.73	1194	3.13	1257	3.54	1316	3.97

Notes:

- Selections in *ITALICS* require a field drive change. See following table below for drive ranges.
- Table includes all internal pressure drops including cabinet losses. See Pressure Drops table that must be considered as part of external static pressure drop.

SUPPLY FAN DRIVE DATA - PCB120

Motor Sheave - Adjustable		Factory Setting					
Fan Sheave - Fixed		Two Turns Opens					
Motor Sheave Turns Open		0	1	2	3	4	5
Fan RPM	3.0 HP Motor	1242	1186	1129	1073	1016	960

Note: Allow ±5% variation in blower RPM due to pulley manufacturing tolerances.

Conversion Factor:

- 1 CFM = 0.472 L/S
- 1" W.C. = 2.5 M Bar
- 1 HP = 0.747 kW



FAN PERFORMANCE DATA (CONT.)

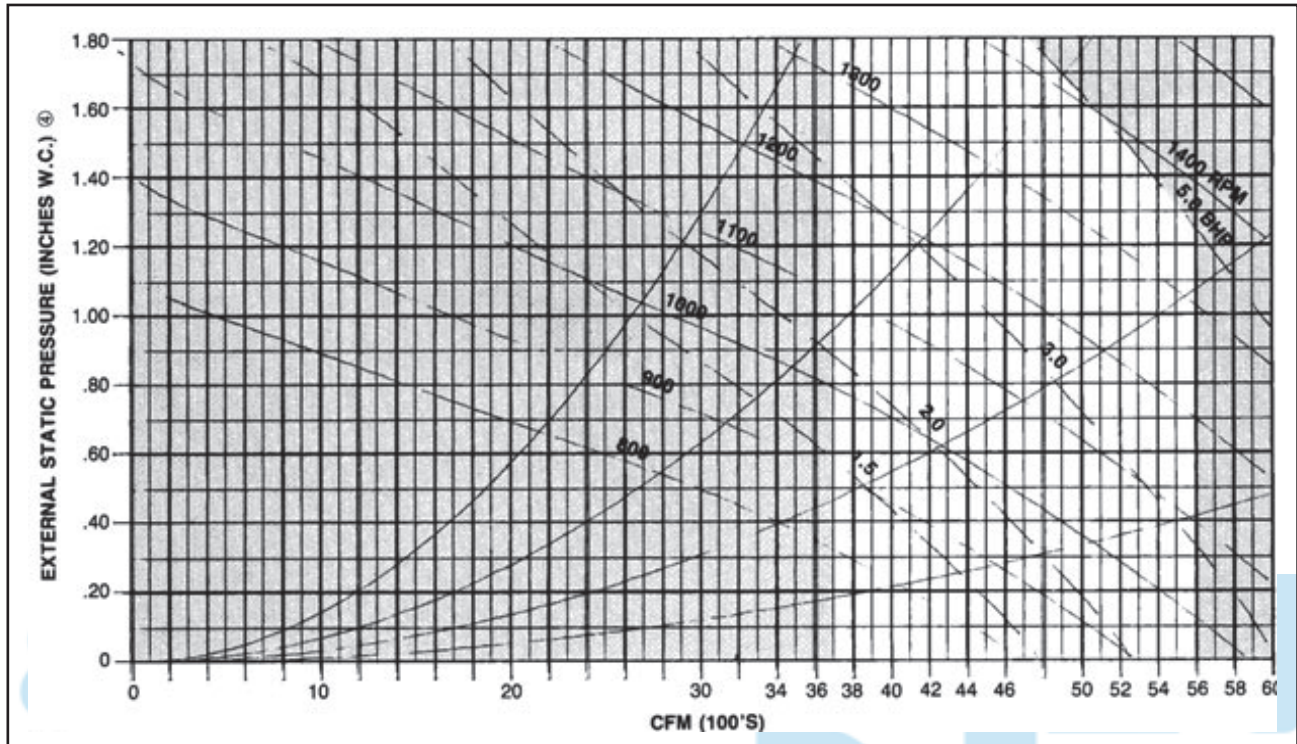


FIGURE 6. FAN CURVE - PCB180

SUPPLY FAN PERFORMANCE - PCB180

CFM	External Static Pressure (Inches W.C.) See Last Note															
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
4000	784	1.14	876	1.44	959	1.76	1036	2.10	1108	2.47	1176	2.86	1239	3.26	1300	3.67
4200	814	1.29	903	1.60	983	1.93	1058	2.28	1129	2.66	1195	3.05	1258	3.46	1318	3.89
4400	844	1.45	930	1.78	1008	2.12	1081	2.48	1150	2.86	1215	3.26	1277	3.68	1337	4.12
4600	874	1.63	957	1.97	1034	2.32	1105	2.69	1172	3.08	1236	3.49	1297	3.92	1356	4.37
4800	904	1.82	986	2.17	1060	2.54	1129	2.92	1195	3.32	1258	3.74	1318	4.17	1375	4.63
5000	932	2.02	1014	2.39	1086	2.77	1159	3.16	1218	3.57	1280	4.00	1338	4.44	1395	4.91
5200	966	2.24	1043	2.62	1113	3.01	1179	3.42	1242	3.84	1302	4.27	1360	4.73	1416	5.20
5400	997	2.48	1071	2.87	1141	3.28	1205	3.70	1267	4.12	1326	4.57	1382	5.03	1437	5.51
5600	1029	2.74	1101	3.14	1168	3.56	1231	3.99	1291	4.43	1394	4.88	1405	5.36	1458	5.85

Notes:

- Selections in *ITALICS* require a field drive change. See following table below for drive ranges.
- Table includes all internal pressure drops including cabinet losses. See Pressure Drops table that must be considered as part of external static pressure drop.
- DO NOT SELECT IN SHADED AREAS (FOR INTERPOLATION ONLY).

SUPPLY FAN DRIVE DATA - PCB180

Motor Sheave - Adjustable		Factory Setting					
Fan Sheave - Fixed		2 Turns Opens					
Motor Sheave Turns Open	0	1	2	3	4	5	
Fan RPM	5.0 HP Motor	1400	1446	1273	1209	1146	1082

Note: Allow ±5% variation in blower RPM due to pulley manufacturing tolerances.

Conversion Factor:

- 1 CFM = 0.472 L/S
- 1" W.C. = 2.5 M Bar
- 1 HP = 0.747 kW



PRODUCT SPECIFICATIONS

FAN PERFORMANCE DATA (CONT.)

COMPONENT PRESSURE DROPS

MODEL	CFM	WET COIL	ELEC. HEAT	MED. EFF. FILTERS	ECONO. RETURN AIR DAMPER
090	2600	0.06	0.03	0.03	0.14
	3000	0.06	0.04	0.04	0.14
	3400	0.07	0.05	0.05	0.18
120	3600	0.05	0.05	0.03	0.14
	4000	0.05	0.06	0.04	0.14
	4400	0.05	0.08	0.04	0.14
180	5000	0.13	0.10	0.06	0.18
	5400	0.13	0.12	0.06	0.21
	5600	0.16	0.13	0.08	0.23

COOLING CAPACITY DATA

PCB090-5 (SI UNITS)

INDOOR AIR		CONDENSER AIR TEMPERATURE														
L/S	WB	23.9 °C			29.4 °C			35.0 °C			40.6 °C			46.1 °C		
		Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw
1203	22.2	32.77	15.48	8.36	30.67	14.52	9.29	28.56	13.56	10.23	26.46	12.60	11.17	24.35	11.64	12.10
	19.4	30.23	18.70	7.82	28.17	17.90	8.73	26.11	17.10	9.64	24.05	16.31	10.55	21.99	15.51	11.46
	16.7	27.52	23.00	7.46	26.07	21.73	8.30	24.62	20.45	9.14	23.17	19.18	9.98	21.72	17.91	10.82
	13.9	26.59	24.96	7.18	24.98	23.20	8.06	23.38	21.43	8.94	21.77	19.67	9.83	20.17	17.91	10.71
1416	22.2	34.17	17.16	8.63	31.91	16.15	9.58	29.65	15.14	10.53	27.39	14.14	11.48	25.13	13.13	12.43
	19.4	31.36	21.95	8.08	29.28	20.81	9.01	27.20	19.66	9.93	25.12	18.52	10.86	23.03	17.38	11.78
	16.7	28.62	26.83	7.53	26.96	25.02	8.49	25.30	23.20	9.44	23.65	21.39	10.40	21.99	19.58	11.35
	13.9	28.62	26.83	7.53	26.96	25.02	8.49	25.30	23.20	9.44	23.65	21.39	10.40	21.99	19.58	11.35
1628	22.2	35.01	18.42	8.82	32.73	17.46	9.77	30.46	16.50	10.73	28.18	15.54	11.69	25.90	14.59	12.64
	19.4	32.19	24.67	8.28	30.10	23.35	9.21	28.00	22.04	10.14	25.91	20.72	11.07	23.81	19.40	11.99
	16.7	30.24	28.49	7.89	28.44	26.54	8.86	26.64	24.60	9.84	24.84	22.65	10.81	23.03	20.71	11.78
	13.9	30.24	28.49	7.89	28.44	26.54	8.86	26.64	24.60	9.84	24.84	22.65	10.81	23.03	20.71	11.78

Sensible heat capacities shown are based on 26.7 °C DB entering air at the evaporator coil. For sensible heat capacities at other than 26.7 °C DB, deduct 44.32 W per 47 L/S of evaporator coil air for each degree below 26.7 °C, or add 44.32 W per 47 L/S of evaporator coil air per degree above 26.7 °C.

PCB090-5 (ENGLISH UNITS)

INDOOR AIR		CONDENSER AIR TEMPERATURE														
SCFM	WB	75 °F			85 °F			95 °F			105 °F			115 °F		
		Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw
2550	72	111.8	52.8	8.36	104.6	49.6	9.29	97.5	46.3	10.23	90.3	43.0	11.17	83.1	39.7	12.10
	67	103.2	63.8	7.82	96.1	61.1	8.73	89.1	58.4	9.64	82.1	55.6	10.55	75.0	52.9	11.46
	62	93.9	78.5	7.46	89.0	74.1	8.30	84.0	69.8	9.14	79.1	65.5	9.98	74.1	61.1	10.82
	57	90.7	85.2	7.18	85.2	79.1	8.06	79.8	73.1	8.94	74.3	67.1	9.83	68.8	61.1	10.71
3000	72	116.6	58.5	8.63	108.9	55.1	9.58	101.2	51.7	10.53	93.5	48.2	11.48	85.7	44.8	12.43
	67	107.0	74.9	8.08	99.9	71.0	9.01	92.8	67.1	9.93	85.7	63.2	10.86	78.6	59.3	11.78
	62	97.6	91.6	7.53	92.0	85.4	8.49	86.3	79.2	9.44	80.7	73.0	10.40	75.0	66.8	11.35
	57	97.6	91.6	7.53	92.0	85.4	8.49	86.3	79.2	9.44	80.7	73.0	10.40	75.0	66.8	11.35
3450	72	119.5	62.9	8.82	111.7	59.6	9.77	103.9	56.3	10.73	96.2	53.0	11.69	88.4	49.8	12.64
	67	109.9	84.2	8.28	102.7	79.7	9.21	95.6	75.2	10.14	88.4	70.7	11.07	81.3	66.2	11.99
	62	103.2	97.2	7.89	97.0	90.6	8.86	90.9	83.9	9.84	84.7	77.3	10.81	78.6	70.7	11.78
	57	103.2	97.2	7.89	97.0	90.6	8.86	90.9	83.9	9.84	84.7	77.3	10.81	78.6	70.7	11.78

Sensible heat capacities shown are based on 80 °F DB entering air at the evaporator coil. For sensible heat capacities at other than 80 °F DB, deduct 84 BTU/h per 100 CFM of evaporator coil air for each degree below 80 °F, or add 84 BTU/h per 100 CFM of evaporator coil air per degree above 80 °F.



COOLING CAPACITY DATA (CONT.)

PCB120-5 (SI UNITS)

INDOOR AIR		CONDENSER AIR TEMPERATURE														
		23.9 °C			29.4 °C			35.0 °C			40.6 °C			46.1 °C		
L/S	WB	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw
1605	22.2	43.67	21.02	9.95	41.04	19.52	11.27	38.41	18.03	12.59	35.78	16.54	13.91	33.15	15.04	15.23
	19.4	40.29	25.44	9.31	37.70	24.09	10.59	35.11	22.74	11.86	32.52	21.38	13.14	29.93	20.03	14.41
	16.7	36.65	31.24	8.89	34.88	29.22	10.07	33.11	27.19	11.25	31.34	25.17	12.43	29.57	23.14	13.61
	13.9	35.42	33.85	8.54	33.43	31.17	9.78	31.44	28.49	11.01	29.45	25.82	12.24	27.45	23.14	13.47
1888	22.2	45.54	23.30	10.28	42.71	21.72	11.62	39.87	20.13	12.96	37.04	18.55	14.30	34.20	16.96	15.64
	19.4	41.79	29.83	9.62	39.18	27.99	10.92	36.57	26.14	12.22	33.97	24.29	13.52	31.36	22.45	14.82
	16.7	38.12	36.41	8.95	36.07	33.63	10.29	34.03	30.85	11.62	31.98	28.07	12.95	29.93	25.29	14.29
	13.9	38.12	36.41	8.95	36.07	33.63	10.29	34.03	30.85	11.62	31.98	28.07	12.95	29.93	25.29	14.29
2170	22.2	46.65	25.03	10.50	43.81	23.49	11.85	40.96	21.94	13.20	38.11	20.39	14.55	35.26	18.84	15.90
	19.4	42.90	33.53	9.86	40.28	31.41	11.17	37.66	29.29	12.48	35.04	27.18	13.78	32.41	25.06	15.09
	16.7	40.29	38.65	9.39	38.05	35.67	10.75	35.82	32.70	12.11	33.59	29.72	13.46	31.36	26.75	14.82
	13.9	40.29	38.65	9.39	38.05	35.67	10.75	35.82	32.70	12.11	33.59	29.72	13.46	31.36	26.75	14.82

Sensible heat capacities shown are based on 26.7°C DB entering air at the evaporator coil. For sensible heat capacities at other than 26.7°C DB, deduct 44.32 W per 47 L/S of evaporator coil air for each degree below 26.7°C, or add 44.32 W per 47 L/S of evaporator coil air per degree above 26.7°C.

PCB120-5 (ENGLISH UNITS)

INDOOR AIR		CONDENSER AIR TEMPERATURE														
		75 °F			85 °F			95 °F			105 °F			115 °F		
SCFM	WB	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw
3400	72	149.0	71.7	9.95	140.0	66.6	11.27	131.1	61.5	12.59	122.1	56.4	13.91	113.1	51.3	15.23
	67	137.5	86.8	9.31	128.6	82.2	10.59	119.8	77.6	11.86	111.0	73.0	13.14	102.1	68.4	14.41
	62	125.1	106.6	8.89	119.0	99.7	10.07	113.0	92.8	11.25	106.9	85.9	12.43	100.9	79.0	13.61
	57	120.9	115.5	8.54	114.1	106.4	9.78	107.3	97.2	11.01	100.5	88.1	12.24	93.7	79.0	13.47
4000	72	155.4	79.5	10.28	145.7	74.1	11.62	136.1	68.7	12.96	126.4	63.3	14.30	116.7	57.9	15.64
	67	142.6	101.8	9.62	133.7	95.5	10.92	124.8	89.2	12.22	115.9	82.9	13.52	107.0	76.6	14.82
	62	130.1	124.2	8.95	123.1	114.7	10.29	116.1	105.3	11.62	109.1	95.8	12.95	102.1	86.3	14.29
	57	130.1	124.2	8.95	123.1	114.7	10.29	116.1	105.3	11.62	109.1	95.8	12.95	102.1	86.3	14.29
4600	72	159.2	85.4	10.50	149.5	80.1	11.85	139.8	74.9	13.20	130.0	69.6	14.55	120.3	64.3	15.90
	67	146.4	114.4	9.86	137.5	107.2	11.17	128.5	100.0	12.48	119.6	92.7	13.78	110.6	85.5	15.09
	62	137.5	131.9	9.39	129.9	121.7	10.75	122.2	111.6	12.11	114.6	101.4	13.46	107.0	91.3	14.82
	57	137.5	131.9	9.39	129.9	121.7	10.75	122.2	111.6	12.11	114.6	101.4	13.46	107.0	91.3	14.82

Sensible heat capacities shown are based on 80°F DB entering air at the evaporator coil. For sensible heat capacities at other than 80°F DB, deduct 84 BTU/h per 100 CFM of evaporator coil air for each degree below 80°F, or add 84 BTU/h per 100 CFM of evaporator coil air per degree above 80°F.

PCB180-5 (SI UNITS)

INDOOR AIR		CONDENSER AIR TEMPERATURE														
		23.9 °C			29.4 °C			35.0 °C			40.6 °C			46.1 °C		
L/S	WB	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw	Total Cap.	Sens Cap.	Kw
2246	22.2	64.17	29.53	16.42	60.17	28.00	18.63	56.17	26.48	20.83	52.17	24.95	23.04	48.17	23.43	25.25
	19.4	59.19	35.59	15.36	55.27	34.49	17.50	51.35	33.39	19.63	47.42	32.29	21.76	43.50	31.20	23.89
	16.7	53.86	43.83	14.67	51.14	41.88	16.64	48.42	39.93	18.61	45.69	37.99	20.59	42.97	36.04	22.56
	13.9	52.05	47.66	14.10	49.01	44.75	16.15	45.97	41.85	18.21	42.93	38.94	20.27	39.90	36.04	22.33
2643	22.2	66.90	32.71	16.97	62.61	31.14	19.21	58.31	29.56	21.45	54.01	27.99	23.68	49.71	26.42	25.92
	19.4	61.40	41.82	15.87	57.44	40.10	18.05	53.48	38.39	20.22	49.53	36.68	22.40	45.57	34.96	24.57
	16.7	56.02	51.22	14.77	52.89	48.26	17.00	49.76	45.30	19.23	46.63	42.34	21.46	43.50	39.38	23.68
	13.9	56.02	51.22	14.77	52.89	48.26	17.00	49.76	45.30	19.23	46.63	42.34	21.46	43.50	39.38	23.68
3039	22.2	68.54	35.09	17.33	64.22	33.66	19.59	59.89	32.22	21.85	55.57	30.78	24.11	51.24	29.34	26.37
	19.4	63.03	47.01	16.27	59.05	45.02	18.46	55.07	43.02	20.64	51.09	41.02	22.83	47.11	39.03	25.01
	16.7	59.20	54.38	15.49	55.79	51.20	17.76	52.38	48.02	20.03	48.98	44.84	22.30	45.57	41.66	24.57
	13.9	59.20	54.38	15.49	55.79	51.20	17.76	52.38	48.02	20.03	48.98	44.84	22.30	45.57	41.66	24.57

Sensible heat capacities shown are based on 26.7°C DB entering air at the evaporator coil. For sensible heat capacities at other than 26.7°C DB, deduct 44.32 W per 47 L/S of evaporator coil air for each degree below 26.7°C, or add 44.32 W per 47 L/S of evaporator coil air per degree above 26.7°C.



PRODUCT SPECIFICATIONS

COOLING CAPACITY DATA (CONT.)

PCB180-5 (ENGLISH UNITS)

INDOOR AIR		CONDENSER AIR TEMPERATURE														
		75 °F			85 °F			95 °F			105 °F			115 °F		
SCFM	WB	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw	Total Kbtuh	Sens Kbtuh	Kw
4760	72	219.0	100.8	16.42	205.3	95.6	18.63	191.7	90.4	20.83	178.0	85.1	23.04	164.4	79.9	25.25
	67	202.0	121.4	15.36	188.6	117.7	17.50	175.2	113.9	19.63	161.8	110.2	21.76	148.4	106.5	23.89
	62	183.8	149.6	14.67	174.5	142.9	16.64	165.2	136.3	18.61	155.9	129.6	20.59	146.6	123.0	22.56
	57	177.6	162.6	14.10	167.2	152.7	16.15	156.9	142.8	18.21	146.5	132.9	20.27	136.1	123.0	22.33
5600	72	228.3	111.6	16.97	213.6	106.3	19.21	199.0	100.9	21.45	184.3	95.5	23.68	169.6	90.1	25.92
	67	209.5	142.7	15.87	196.0	136.9	18.05	182.5	131.0	20.22	169.0	125.2	22.40	155.5	119.3	24.46
	62	191.1	174.8	14.77	180.5	164.7	17.00	169.8	154.6	19.23	159.1	144.5	21.46	148.4	134.4	23.68
	57	191.1	174.8	14.77	180.5	164.7	17.00	169.8	154.6	19.23	159.1	144.5	21.46	148.4	134.4	23.68
6440	72	233.9	119.7	17.33	219.1	114.8	19.59	204.4	109.9	21.85	189.6	105.0	24.11	174.9	100.1	26.37
	67	215.1	160.4	16.27	201.5	153.6	18.46	187.9	146.8	20.64	174.3	140.0	22.83	160.7	133.2	25.01
	62	202.0	185.6	15.49	190.4	174.7	17.76	178.8	163.9	20.03	167.1	153.0	22.30	155.5	142.1	24.57
	57	202.0	185.6	15.49	190.4	174.7	17.76	178.8	163.9	20.03	167.1	153.0	22.30	155.5	142.1	24.57

Sensible heat capacities shown are based on 80 °F DB entering air at the evaporator coil. For sensible heat capacities at other than 80 °F DB, deduct 84 BTU/h per 100 CFM of evaporator coil air for each degree below 80 °F, or add 84 BTU/h per 100 CFM of evaporator coil air per degree above 80 °F.

EVAPORATOR MOTOR HEAT

Horsepower/(kW)	BTU/h (KW)
2 (1.49)	4400 (1.29)
3 (2.24)	6200 (1.82)
5 (3.73)	10,500 (3.08)